



PEAK 6

Technical *specifications*

PIVIUK BEYOND
THE GLIDE


TECHNICAL SPECIFICATIONS

			21	22	24	26
Cells	Number		80	80	80	80
Aspect ratio	Flat		6,9	6,9	6,9	6,9
	Projected		5,26	5,26	5,26	5,26
Area	Flat	m2	20,5	22	23,7	26
	Projected	m2	17,55	18,83	20,29	21,83
Span	Flat	m	11,89	12,32	12,79	13,27
Chord	Max	m	2,2	2,28	2,36	2,45
Lines	Total	m	198	205	213	224
	Main		2-1/3	2-1/3	2-1/3	2-1/3
Risers	Number		A-A´/B	A-A´/B	A-A´/B	A-A´/B
	Speed-bar	mm	140	165	175	175
Glider weight		kg	4,8	5	5,3	5,6
Total weight in flight	Min-Max	kg	70-85	80-98	92-110	105-125
Opt. weight in flight	Min-Max	kg	78-82	89-94	104-107	115-120
Certification			EN/LTF D	EN/LTF D	EN/LTF D	EN/LTF D

MATERIALS

CANOPY	FABRIC CODE	SUPPLIER
UPPER SURFACE	30 DMF / N20 DMF	DOMINICO TEX CO (KOREA)
BOTTOM SURFACE	70000 E3H	PORCHER IND (FRANCE)
PROFILES	30 DFM / 2044 32 FM	DOMINICO TEX CO (KOREA)
DIAGONALS	30 DFM / 2044 32 FM	DOMINICO TEX CO (KOREA)
LOOPS	LKI - 12	KOLON IND. (KOREA)
REINFORCEMENT LOOPS	DACRON / RIPSTOP	D-P (GERMANY)
TRAILING EDGE REINFORCEMENT	MYLAR	D-P (GERMANY)
RIBS REINFORCEMENT	LTN-0.8/0.5 STICK	SPORTWARE CO.CHINA
THREAD	SERAFIL 60	AMAN (GERMANY)
SUSPENSION LINES	FABRIC CODE	SUPPLIER
UPPER CASCADES	DC - 60	LIROS GMHB (GERMANY)
UPPER CASCADES	DC - 40	LIROS GMHB (GERMANY)
UPPER CASCADES	DC - 35	LIROS GMHB (GERMANY)
UPPER CASCADES	A-8001/U 50	EDELRID (GERMANY)
UPPER CASCADES	A-8001/U 70	EDELRID (GERMANY)
MIDDLE CASCADES	DC - 35	LIROS GMHB (GERMANY)
MIDDLE CASCADES	A-8001/U 50	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 70	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 90	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 130	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 190	EDELRID (GERMANY)
MIDDLE CASCADES	A-8001/U 230	EDELRID (GERMANY)
MAIN	A-8001/U 70	EDELRID (GERMANY)
MAIN	A-8001/U 130	EDELRID (GERMANY)
MAIN	A-8001/U 190	EDELRID (GERMANY)
MAIN	A-8001/U 340	EDELRID (GERMANY)
MAIN	A-8001/U 470	EDELRID (GERMANY)
MAIN BREAK	TARAX-200	EDELRID (GERMANY)
THREAD	SERAFIL 60	AMAN (GERMANY)
RISERS	FABRIC CODE	SUPPLIER
MATERIAL	3455	COUSIN (FRANCE)
COLOR INDICATOR	210D	TECNI SANGLES (FRANCE)
THREAD	V138	COATS (ENGLAND)
MAILLONS	3.5	ANSUNG PRECISION (KOREA)
PULLEYS	RF25109	RONSTAN (AUSTRALIA)

LINE PLAN

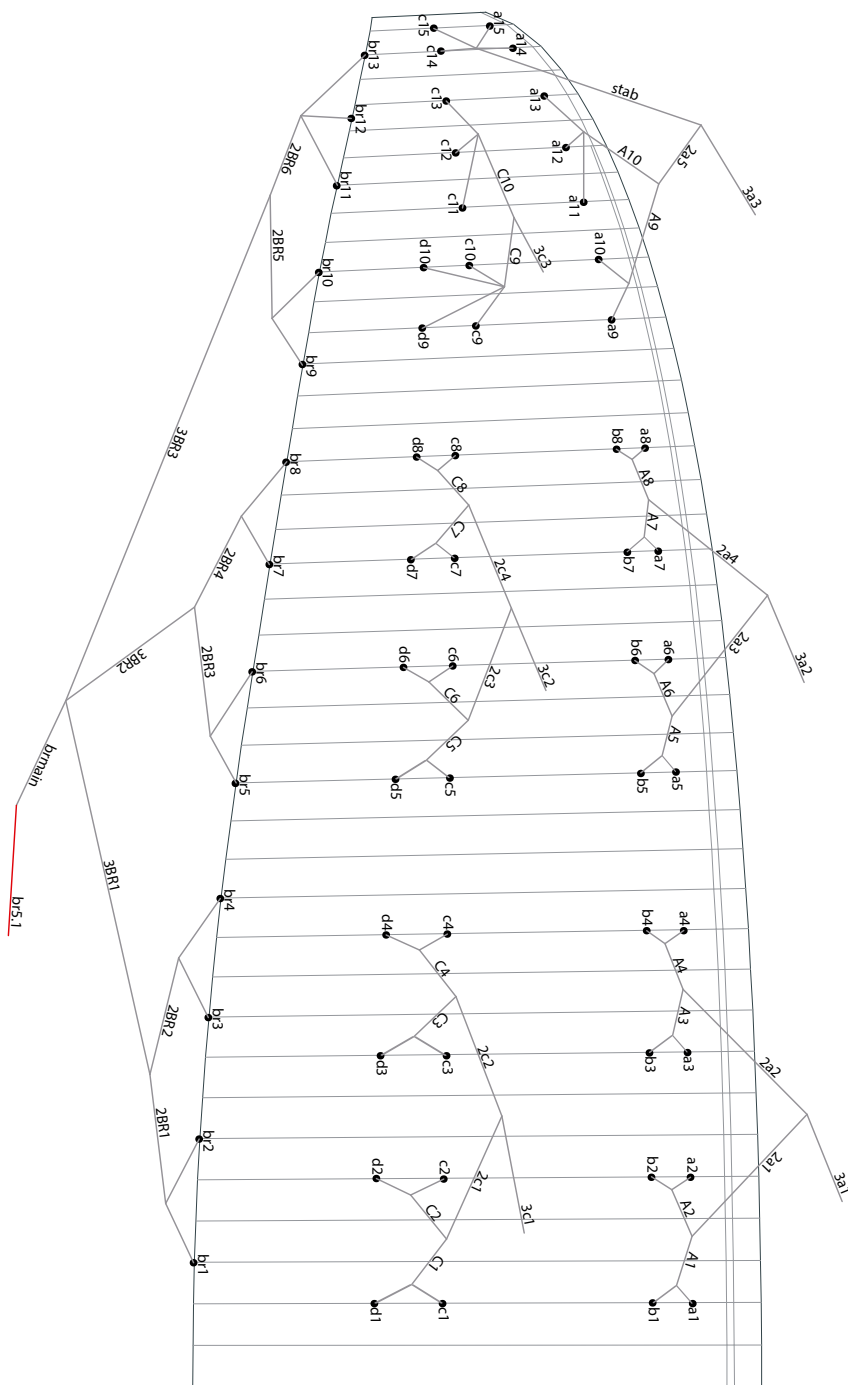

LINE REPLACEMENT

The use of new high performance materials in modern wings is now common. The advantages of using these materials in terms of performance are widely acknowledged as part of our sport's evolution. However, along with those technological advances come additional responsibilities which cannot be avoided. As a result, line inspection and replacement must be carried out more frequently. That increased frequency appears to be encouraging some pilots to try to perform line replacement themselves.

WE STRONGLY RECOMMEND ANY LINE REPLACEMENT IS PERFORMED BY AN AUTHORISED SPECIALIST ONLY.

Ultimately, if the pilot decides to perform any line replacement without professional oversight they therefore assume all responsibility. In this case, these guidelines will have to be followed.

BEFORE REMOVING ANY LINES, CHECK:

- That the line plan is correct according to the glider model and size.
- That the line kit is complete and correct.
- Never assume but always check each individual line for the correct specification.

AFTER CONFIRMING THAT ALL LINES ARE CORRECT:


- Fit the new line(s) WITHOUT removing the label.
- Once replaced, measure each line length to confirm the correct measurement.
- Inflate the wing to check for any irregularities.
- The line labels may then be removed but NOT BEFORE completion of the line replacement.

Niviuk strongly recommends for any line replacement to be carried out by an authorised professional only, and will not accept responsibility for any damage or injury caused as a result of incorrect re-assembly.

SPECIAL CONFIGURATION ON LINES 3C1 – 3C2 – 3C3

The 3C1 – 3C2 – 3C3 lines are connected to the maillon by means of a lark's foot/ clove hitch. See diagram.

The lark's foot/clove hitch is used to adjust the trim to the preset range. The loop will allow readjustment of the trim due to use, stretching or shrinking. Failure to make this loop compromises the trim of the wing and the safety of the pilot.

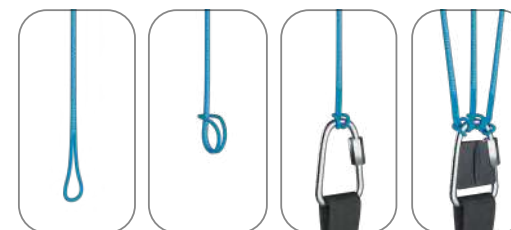

RISER PLAN


A	A'	B
3a1	3a3	3c1
3a2		3c2
		3c3



COLORS



LIZARD	SB1	SPECTRA GREEN	TOP	REF: 5335
	SB2	WHITE	BOTTOM-ALL WHITE	REF: 001
	SB3	BLACK	HORN	REF: 102
	SB4	LIMA	PRINCIPAL SHADOW	REF: 500

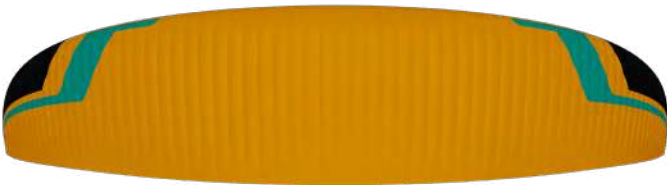

ZEESTER	SB1	ORANGE	TOP	REF: 744
	SB2	WHITE	BOTTOM	REF: 001
	SB3	BLACK	HORN	REF: 102
	SB4	SPECTRA GREEN	PRINCIPAL SHADOW	REF: 5335



ZURA	SB1	SLATE BLUE	TOP	REF: 317
	SB2	WHITE	BOTTOM	REF: 001
	SB3	PINK	HORN	REF: 2047
	SB4	WHITE	PRINCIPAL SHADOW	REF: 001

WING LOAD

PEAK 6

21			22			24			26		
P.T.V.	KG/M2		P.T.V.	KG/M2		P.T.V.	KG/M2		P.T.V.	KG/M2	
70	=	3,41	80	=	3,64	92	=	3,88	105	=	4,04
71	=	3,46	81	=	3,68	93	=	3,92	106	=	4,08
72	=	3,51	82	=	3,73	94	=	3,97	107	=	4,12
73	=	3,56	83	=	3,77	95	=	4,01	108	=	4,15
74	=	3,61	84	=	3,82	96	=	4,05	109	=	4,19
75	=	3,66	85	=	3,86	97	=	4,09	110	=	4,23
76	=	3,71	86	=	3,91	98	=	4,14	111	=	4,27
77	=	3,76	87	=	3,95	99	=	4,18	112	=	4,31
78	=	3,80	88	=	4,00	100	=	4,22	113	=	4,35
79	=	3,85	89	=	4,05	101	=	4,26	114	=	4,38
80	=	3,90	90	=	4,09	102	=	4,30	115	=	4,42
81	=	3,95	91	=	4,14	103	=	4,35	116	=	4,46
82	=	4,00	92	=	4,18	104	=	4,39	117	=	4,50
83	=	4,05	93	=	4,23	105	=	4,43	118	=	4,54
84	=	4,10	94	=	4,27	106	=	4,47	119	=	4,58
85	=	4,15	95	=	4,32	107	=	4,51	120	=	4,62
			96	=	4,36	108	=	4,56	121	=	4,65
			97	=	4,41	109	=	4,60	122	=	4,69
			98	=	4,45	110	=	4,64	123	=	4,73
									124	=	4,77
									125	=	4,81

LINES

PEAK 6 21

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm																				
A					B					C					D					BRAKE																								
a1	8001/U	70	ORANGE	353	b1	8001/U	50	ORG	324	c1	8001/U	50	BLUE	535	d1	DC	35	WHT	632	br1	DC	35	WHT	833																				
a2	8001/U	70	ORANGE	349	b2	8001/U	50	ORG	319	c2	8001/U	50	BLUE	527	d2	DC	35	WHT	625	br2	DC	35	WHT	561																				
a3	8001/U	70	ORANGE	342	b3	8001/U	50	ORG	312	c3	8001/U	50	BLUE	516	d3	DC	35	WHT	612	br3	DC	35	WHT	717																				
a4	8001/U	70	ORANGE	331	b4	8001/U	50	ORG	303	c4	8001/U	50	BLUE	485	d4	DC	35	WHT	570	br4	DC	35	WHT	783																				
a5	8001/U	70	ORANGE	323	b5	8001/U	50	ORG	297	c5	8001/U	50	BLUE	425	d5	DC	35	WHT	506	br5	DC	35	WHT	758																				
a6	8001/U	70	ORANGE	317	b6	8001/U	50	ORG	292	c6	8001/U	50	BLUE	386	d6	DC	35	WHT	459	br6	DC	35	WHT	570																				
a7	8001/U	70	ORANGE	303	b7	8001/U	50	ORG	279	c7	8001/U	50	BLUE	344	d7	DC	35	WHT	411	br7	DC	35	WHT	616																				
a8	8001/U	70	ORANGE	279	b8	8001/U	50	ORG	261	c8	8001/U	50	BLUE	308	d8	DC	35	WHT	365	br8	DC	35	WHT	684																				
a9	DC	60	WHT	809						c9	DC	40	WHT	600	d9	DC	35	WHT	660	br9	DC	35	WHT	628																				
a10	DC	35	WHT	713						c10	DC	35	WHT	503	d10	DC	35	WHT	562	br10	DC	35	WHT	516																				
a11	DC	35	WHT	733						c11	DC	35	WHT	519						br11	DC	35	WHT	828																				
a12	DC	35	WHT	677						c12	DC	35	WHT	487						br12	DC	35	WHT	825																				
a13	DC	35	WHT	697						c13	DC	35	WHT	550						br13	DC	35	WHT	900																				
a14	DC	35	WHT	601						c14	DC	35	WHT	623																														
a15	DC	35	WHT	578						c15	DC	35	WHT	614																														
A1	8001/U	90	ORANGE	985						C1	8001/U	50	Blue	496						2BR1	DC	35	Wht	839																				
A2	8001/U	90	ORANGE	902						C2	8001/U	50	BLUE	382						2BR2	DC	35	WHT	580																				
A3	8001/U	90	ORANGE	912						C3	8001/U	50	BLUE	395						2BR3	DC	35	WHT	730																				
A4	8001/U	90	ORANGE	963						C4	8001/U	50	BLUE	505						2BR4	DC	35	WHT	617																				
A5	8001/U	90	ORANGE	874						C5	8001/U	50	BLUE	501						2BR5	DC	35	WHT	821																				
A6	8001/U	90	ORANGE	766						C6	8001/U	50	BLUE	405						2BR6	DC	35	WHT	442																				
A7	8001/U	90	ORANGE	778						C7	8001/U	50	BLUE	445																														
A8	8001/U	90	ORANGE	786						C8	8001/U	50	BLUE	513																														
A9	8001/U	70	ORANGE	762						C9	8001/U	50	BLUE	548																														
A10	8001/U	70	ORANGE	678						C10	8001/U	50	BLUE	482																														
2a1	8001/U	190	ORANGE	1249						2c1	8001/U	90	BLUE	936						3BR1	8001/U	50	ORANGE	3251																				
2a2	8001/U	190	ORANGE	1229						2c2	8001/U	90	BLUE	916						3BR2	8001/U	50	ORANGE	2943																				
2a3	8001/U	190	ORANGE	1104						2c3	8001/U	90	BLUE	831						3BR3	8001/U	50	ORANGE	2651																				
2a4	8001/U	190	ORANGE	1037						2c4	8001/U	90	BLUE	775						BRMAIN	8001/U	90	ORANGE	1289																				
2a5	8001/U	90	ORANGE	1906																																								
STAB	8001/U	50	ORANGE	2558																																								
3a1	8001/U	340	ORANGE	4236						3c1	8001/U	190	BLUE	4861						br5.1	TARAX	200	RED	1500																				
3a2	8001/U	340	ORANGE	4369						3c2	8001/U	190	BLUE	4903																														
3a3	8001/U	130	ORANGE	2806						3c3	8001/U	70	BLUE	5137																														
																				KNOT POINT:		1300																						

LINES

PEAK 6 22

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm					
A					B					C					D					BRAKE									
a1	8001/U	70	ORANGE	366	b1	8001/U	50	ORANGE	336	c1	8001/U	50	BLUE	554	d1	DC	35	WHT	655	br1	DC	35	WHT	863					
a2	8001/U	70	ORANGE	362	b2	8001/U	50	ORANGE	330	c2	8001/U	50	BLUE	545	d2	DC	35	WHT	647	br2	DC	35	WHT	581					
a3	8001/U	70	ORANGE	354	b3	8001/U	50	ORANGE	323	c3	8001/U	50	BLUE	535	d3	DC	35	WHT	633	br3	DC	35	WHT	743					
a4	8001/U	70	ORANGE	342	b4	8001/U	50	ORANGE	314	c4	8001/U	50	BLUE	502	d4	DC	35	WHT	590	br4	DC	35	WHT	812					
a5	8001/U	70	ORANGE	335	b5	8001/U	50	ORANGE	308	c5	8001/U	50	BLUE	440	d5	DC	35	WHT	524	br5	DC	35	WHT	786					
a6	8001/U	70	ORANGE	329	b6	8001/U	50	ORANGE	302	c6	8001/U	50	BLUE	400	d6	DC	35	WHT	475	br6	DC	35	WHT	591					
a7	8001/U	70	ORANGE	314	b7	8001/U	50	ORANGE	289	c7	8001/U	50	BLUE	357	d7	DC	35	WHT	426	br7	DC	35	WHT	637					
a8	8001/U	70	ORANGE	289	b8	8001/U	50	ORANGE	271	c8	8001/U	50	BLUE	319	d8	DC	35	WHT	378	br8	DC	35	WHT	709					
a9	DC	60	WHT	838						c9	DC	40	WHT	622	d9	DC	35	WHT	683	br9	DC	35	WHT	650					
a10	DC	35	WHT	738						c10	DC	35	WHT	521	d10	DC	35	WHT	582	br10	DC	35	WHT	535					
a11	DC	35	WHT	759						c11	DC	35	WHT	537						br11	DC	35	WHT	857					
a12	DC	35	WHT	701						c12	DC	35	WHT	505						br12	DC	35	WHT	854					
a13	DC	35	WHT	722						c13	DC	35	WHT	570						br13	DC	35	WHT	932					
a14	DC	35	WHT	622						c14	DC	35	WHT	646															
a15	DC	35	WHT	599						c15	DC	35	WHT	637															
A1	8001/U	90	ORANGE	1019						C1	8001/U	50	Blue	513						2BR1	DC	35	Wht	869					
A2	8001/U	90	ORANGE	934						C2	8001/U	50	BLUE	396						2BR2	DC	35	WHT	601					
A3	8001/U	90	ORANGE	945						C3	8001/U	50	BLUE	410						2BR3	DC	35	WHT	755					
A4	8001/U	90	ORANGE	998						C4	8001/U	50	BLUE	524						2BR4	DC	35	WHT	640					
A5	8001/U	90	ORANGE	905						C5	8001/U	50	BLUE	519						2BR5	DC	35	WHT	850					
A6	8001/U	90	ORANGE	794						C6	8001/U	50	BLUE	419						2BR6	DC	35	WHT	459					
A7	8001/U	90	ORANGE	806						C7	8001/U	50	BLUE	461															
A8	8001/U	90	ORANGE	815						C8	8001/U	50	BLUE	532															
A9	8001/U	70	ORANGE	789						C9	8001/U	50	BLUE	568															
A10	8001/U	70	ORANGE	702						C10	8001/U	50	BLUE	500															
2a1	8001/U	190	ORANGE	1294						2c1	8001/U	90	BLUE	969						3BR1	8001/U	50	ORANGE	3367					
2a2	8001/U	190	ORANGE	1273						2c2	8001/U	90	BLUE	950						3BR2	8001/U	50	ORANGE	3049					
2a3	8001/U	190	ORANGE	1144						2c3	8001/U	90	BLUE	861						3BR3	8001/U	50	ORANGE	2750					
2a4	8001/U	190	ORANGE	1074						2c4	8001/U	90	BLUE	803						BRMAIN	8001/U	90	ORANGE	1397					
2a5	8001/U	90	ORANGE	1974																									
STAB	8001/U	50	ORANGE	2650																									
3a1	8001/U	340	ORANGE	4407						3c1	8001/U	190	BLUE	5054						br5.1	TARAX	200	RED	1500					
3a2	8001/U	340	ORANGE	4547						3c2	8001/U	190	BLUE	5096															
3a3	8001/U	130	ORANGE	2930						3c3	8001/U	70	BLUE	5337															
																				KNOT POINT:		1300							

LINES

PEAK 6 24

REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm					
A					B					C					D					BRAKE									
a1	8001/U	70	ORANGE	380	b1	8001/U	50	ORANGE	349	c1	8001/U	50	BLUE	575	d1	DC	35	WHT	655	br1	DC	35	WHT	896					
a2	8001/U	70	ORANGE	375	b2	8001/U	50	ORANGE	343	c2	8001/U	50	BLUE	566	d2	DC	35	WHT	647	br2	DC	35	WHT	604					
a3	8001/U	70	ORANGE	367	b3	8001/U	50	ORANGE	335	c3	8001/U	50	BLUE	555	d3	DC	35	WHT	633	br3	DC	35	WHT	770					
a4	8001/U	70	ORANGE	355	b4	8001/U	50	ORANGE	326	c4	8001/U	50	BLUE	521	d4	DC	35	WHT	590	br4	DC	35	WHT	843					
a5	8001/U	70	ORANGE	348	b5	8001/U	50	ORANGE	320	c5	8001/U	50	BLUE	457	d5	DC	35	WHT	524	br5	DC	35	WHT	815					
a6	8001/U	70	ORANGE	341	b6	8001/U	50	ORANGE	314	c6	8001/U	50	BLUE	416	d6	DC	35	WHT	475	br6	DC	35	WHT	615					
a7	8001/U	70	ORANGE	325	b7	8001/U	50	ORANGE	300	c7	8001/U	50	BLUE	370	d7	DC	35	WHT	426	br7	DC	35	WHT	661					
a8	8001/U	70	ORANGE	300	b8	8001/U	50	ORANGE	281	c8	8001/U	50	BLUE	331	d8	DC	35	WHT	378	br8	DC	35	WHT	736					
a9	DC	60	WHT	870						c9	DC	40	WHT	645	d9	DC	35	WHT	683	br9	DC	35	WHT	675					
a10	DC	35	WHT	766						c10	DC	35	WHT	541	d10	DC	35	WHT	582	br10	DC	35	WHT	556					
a11	DC	35	WHT	788						c11	DC	35	WHT	558						br11	DC	35	WHT	889					
a12	DC	35	WHT	728						c12	DC	35	WHT	524						br12	DC	35	WHT	886					
a13	DC	35	WHT	749						c13	DC	35	WHT	592						br13	DC	35	WHT	968					
a14	DC	35	WHT	646						c14	DC	35	WHT	670															
a15	DC	35	WHT	622						c15	DC	35	WHT	661															
A1	8001/U	90	ORANGE	1057						C1	8001/U	50	Blue	532						2BR1	DC	35	Wht	901					
A2	8001/U	90	ORANGE	970						C2	8001/U	50	BLUE	411						2BR2	DC	35	WHT	625					
A3	8001/U	90	ORANGE	981						C3	8001/U	50	BLUE	425						2BR3	DC	35	WHT	783					
A4	8001/U	90	ORANGE	1037						C4	8001/U	50	BLUE	545						2BR4	DC	35	WHT	666					
A5	8001/U	90	ORANGE	939						C5	8001/U	50	BLUE	538						2BR5	DC	35	WHT	881					
A6	8001/U	90	ORANGE	824						C6	8001/U	50	BLUE	435						2BR6	DC	35	WHT	477					
A7	8001/U	90	ORANGE	837						C7	8001/U	50	BLUE	479															
A8	8001/U	90	ORANGE	847						C8	8001/U	50	BLUE	552															
A9	8001/U	70	ORANGE	819						C9	8001/U	50	BLUE	590															
A10	8001/U	70	ORANGE	729						C10	8001/U	50	BLUE	519															
2a1	8001/U	190	ORANGE	1342						2c1	8001/U	90	BLUE	1005						3BR1	8001/U	50	ORANGE	3492					
2a2	8001/U	190	ORANGE	1322						2c2	8001/U	90	BLUE	986						3BR2	8001/U	50	ORANGE	3166					
2a3	8001/U	190	ORANGE	1187						2c3	8001/U	90	BLUE	894						3BR3	8001/U	50	ORANGE	2858					
2a4	8001/U	190	ORANGE	1115						2c4	8001/U	90	BLUE	834						BRMAIN	8001/U	90	ORANGE	1516					
2a5	8001/U	90	ORANGE	2049																									
STAB	8001/U	50	ORANGE	2750																									
3a1	8001/U	340	ORANGE	4594						3c1	8001/U	190	BLUE	5266						br5.1	TARAX	200	RED	1500					
3a2	8001/U	340	ORANGE	4743						3c2	8001/U	190	BLUE	5317															
3a3	8001/U	130	ORANGE	3065						3c3	8001/U	70	BLUE	5571															
KNOT POINT:																				1300									

LINES

PEAK 6 26																																							
REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm	REF.	MAT.	kg	COLOR	mm															
A					B					C					D					BRAKE																			
a1	8001/U	70	ORANGE	398	b1	8001/U	70	ORANGE	365	c1	8001/U	70	BLUE	602	d1	DC	35	WHT	711	br1	DC	40	WHT	938															
a2	8001/U	70	ORANGE	393	b2	8001/U	70	ORANGE	359	c2	8001/U	70	BLUE	593	d2	DC	35	WHT	702	br2	DC	40	WHT	634															
a3	8001/U	70	ORANGE	385	b3	8001/U	70	ORANGE	351	c3	8001/U	70	BLUE	581	d3	DC	35	WHT	688	br3	DC	40	WHT	806															
a4	8001/U	70	ORANGE	372	b4	8001/U	70	ORANGE	342	c4	8001/U	70	BLUE	546	d4	DC	35	WHT	640	br4	DC	40	WHT	883															
a5	8001/U	70	ORANGE	364	b5	8001/U	70	ORANGE	335	c5	8001/U	70	BLUE	479	d5	DC	35	WHT	569	br5	DC	40	WHT	854															
a6	8001/U	70	ORANGE	357	b6	8001/U	70	ORANGE	328	c6	8001/U	70	BLUE	435	d6	DC	35	WHT	516	br6	DC	40	WHT	645															
a7	8001/U	70	ORANGE	341	b7	8001/U	70	ORANGE	314	c7	8001/U	70	BLUE	388	d7	DC	35	WHT	462	br7	DC	40	WHT	692															
a8	8001/U	70	ORANGE	315	b8	8001/U	70	ORANGE	294	c8	8001/U	70	BLUE	347	d8	DC	35	WHT	410	br8	DC	40	WHT	771															
a9	DC	60	WHT	911						c9	DC	40	WHT	676	d9	DC	35	WHT	742	br9	DC	40	WHT	707															
a10	DC	40	WHT	803						c10	DC	40	WHT	566	d10	DC	35	WHT	632	br10	DC	40	WHT	583															
a11	DC	35	WHT	825						c11	DC	40	WHT	584						br11	DC	40	WHT	931															
a12	DC	35	WHT	763						c12	DC	40	WHT	549						br12	DC	40	WHT	928															
a13	DC	35	WHT	785						c13	DC	40	WHT	620						br13	DC	40	WHT	1014															
a14	DC	35	WHT	677						c14	DC	40	WHT	702																									
a15	DC	35	WHT	651						c15	DC	40	WHT	692																									
A1	8001/U	130	ORANGE	1106						C1	8001/U	90	Blue	556						2BR1	DC	40	Wht	942															
A2	8001/U	130	ORANGE	1016						C2	8001/U	90	BLUE	430						2BR2	DC	40	WHT	656															
A3	8001/U	130	ORANGE	1028						C3	8001/U	90	BLUE	445						2BR3	DC	40	WHT	819															
A4	8001/U	130	ORANGE	1088						C4	8001/U	90	BLUE	572						2BR4	DC	40	WHT	699															
A5	8001/U	90	ORANGE	983						C5	8001/U	90	BLUE	563						2BR5	DC	40	WHT	922															
A6	8001/U	90	ORANGE	864						C6	8001/U	90	BLUE	456						2BR6	DC	40	WHT	501															
A7	8001/U	90	ORANGE	877						C7	8001/U	90	BLUE	502																									
A8	8001/U	90	ORANGE	888						C8	8001/U	90	BLUE	579																									
A9	8001/U	70	ORANGE	858						C9	8001/U	50	BLUE	618																									
A10	8001/U	70	ORANGE	763						C10	8001/U	50	BLUE	543																									
2a1	8001/U	230	ORANGE	1405						2c1	8001/U	130	BLUE	1052						3BR1	8001/U	70	ORANGE	3656															
2a2	8001/U	230	ORANGE	1386						2c2	8001/U	130	BLUE	1034						3BR2	8001/U	70	ORANGE	3317															
2a3	8001/U	190	ORANGE	1243						2c3	8001/U	130	BLUE	936						3BR3	8001/U	50	ORANGE	2997															
2a4	8001/U	190	ORANGE	1169						2c4	8001/U	130	BLUE	874						BRMAIN	8001/U	190	ORANGE	1669															
2a5	8001/U	130	ORANGE	2146																																			
STAB	8001/U	90	ORANGE	2881																																			
3a1	8001/U	470	ORANGE	4837						3c1	8001/U	230	BLUE	5532						br5.1	TARAX	200	RED	1500															
3a2	8001/U	340	ORANGE	4996						3c2	8001/U	230	BLUE	5590																									
3a3	8001/U	190	ORANGE	3240						3c3	8001/U	70	BLUE	5857																									
																				KNOT POINT:		1300																	

LINE MEASUREMENTS

PEAK 6 - 21

LINES HEIGHT MM					
	A	B	C	D	br
1	7328	7299	7322	7419	7602
2	7241	7211	7200	7298	7330
3	7224	7194	7182	7278	7227
4	7264	7236	7261	7346	7293
5	7175	7149	7154	7235	7110
6	7061	7036	7019	7092	6922
7	6992	6968	6961	7028	6855
8	6976	6958	6993	7050	6923
9	6790		6783	6843	6779
10	6694		6686	6745	6667
11	6630		6636		6600
12	6574		6604		6597
13	6594		6667		6672
14	6482		6504		
15	6459		6495		
RISERS LENGHT MM					
	A	A'	B		
	500	500	500	STANDARD	
	360	405	500	ACCELERATED	

PEAK 6 - 22

LINES HEIGHT MM					
	A	B	C	D	br
1	7585	7556	7592	7695	7886
2	7496	7465	7466	7570	7604
3	7478	7448	7451	7551	7498
4	7519	7492	7532	7622	7567
5	7430	7404	7418	7504	7377
6	7313	7287	7278	7355	7182
7	7240	7216	7219	7290	7113
8	7224	7207	7252	7313	7185
9	7042		7039	7100	7037
10	6943		6939	7000	6922
11	6878		6888		6853
12	6818		6856		6850
13	6839		6921		6928
14	6719		6744		
15	6696		6735		
RISERS LENGHT MM					
	A	A'	B		
	500	500	500	STANDARD	
	335	380	500	ACCELERATED	

LINE MEASUREMENTS

PEAK 6 - 24

LINES HEIGHT MM					
	A	B	C	D	br
1	7879	7848	7872	7976	8195
2	7787	7755	7742	7847	7903
3	7770	7738	7726	7828	7793
4	7814	7785	7812	7903	7866
5	7723	7695	7700	7787	7670
6	7601	7574	7556	7633	7470
7	7526	7501	7494	7565	7399
8	7511	7492	7528	7589	7474
9	7310		7304	7368	7320
10	7206		7200	7263	7201
11	7138		7146		7130
12	7078		7112		7127
13	7099		7180		7209
14	6978		7002		
15	6954		6993		
RISERS LENGHT MM					
	A	A'	B		
	500	500	500	STANDARD	
	325	370	500	ACCELERATED	

PEAK 6 - 26

LINES HEIGHT MM					
	A	B	C	D	br
1	8253	8220	8251	8360	8595
2	8158	8124	8116	8226	8291
3	8142	8109	8101	8208	8177
4	8190	8159	8192	8287	8254
5	8093	8064	8076	8167	8050
6	7967	7938	7926	8006	7840
7	7890	7863	7862	7936	7766
8	7874	7854	7899	7962	7846
9	7664		7664	7730	7685
10	7556		7554	7620	7561
11	7484		7498		7488
12	7421		7462		7485
13	7443		7533		7571
14	7316		7332		
15	7291		7322		
RISERS LENGHT MM					
	A	A'	B		
	500	500	500	STANDARD	
	325	370	500	ACCELERATED	

SUSPENSION

MATERIAL CODE		DC	DC	DC	A-8001/U	A-8001/U	A-8001/U	A-8001/U	A-8001/U	A-8001/U	A-8001/U	A-8001/U	TARAX
STRENGTH CODE		35	40	60	50	70	90	130	190	230	340	470	200
DIAMETER m/m	ø	0,38	0,5	0,6	0,5	0,7	0,8	0,9	1,1	1,1 x 1,4	1,5 X 1,9	1,6 X 2,2	1,7
CORE MATERIAL		DYNEEMA	DYNEEMA	DYNEEMA	ARAMID	ARAMID	ARAMID	ARAMID	ARAMID	ARAMID	ARAMID	ARAMID	DYNEEMA
SLEEVE MATERIAL		NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	POLYESTER
WEIGHT G/M	TOTAL	0,11	0,19	0,24	0,25	0,4	0,5	0,8	1,1	1,4	2,2	2,9	2
BREAKING STRENGTH daN	MINIMUM	35	40	60	50	70	90	130	190	230	340	470	200
	MAXIMUM	38	48	84									
STRENGTH AFTER													
5.000 BENDING	TEST EN	33	33	74	26	39	49	88	52	69	196,6	-	
CYCLES													
ELONGATION AT	5 daN en %				0,4	0,5	0,4	0,4	0,4	0,3	0,2	0,5	0,1-0,3
	10 daN en %	0,77		0,43	0,7	0,7	0,6	0,6	0,6	0,5	0,3	0,6	0,2-0,6
	15 daN en %				1,1	1	0,8	0,8	0,7	0,6	0,4	0,7	0,3-0,7
	20 daN en %				1,5	1,3	1	0,9	0,9	0,7	0,5	0,8	0,3-0,9
	25 daN en %				1,9	1,5	1,3	1	1	0,8	0,6	0,9	0,4-1
	30 daN en %			1,2	3,3	2,8	2,3	1,8	1,6	1,3		1,2	
	75 daN en %					3,7	3,2	3,1	2,7	2,3	1,5	1,6	0,8-1,7
	100 daN en %								2,6	3,6	1,9	1,9	1,2-2
	125 daN en %								3,5	3,3		2,3	
	150 daN en %								4,3	3,6	2,6	2,7	1,6-2,4
	175 daN en %											3,1	
	200 daN en %										3,1	3,2	2-2,8
ELONGATION MAX. BREAKING STRENGTH %				3,2	3,8	3,9	4,3	4	4,4	4,4		5	

MAILLON & PULLEY

DESCRIPTION		
MAILLON	DELTA	
CODE	3.5	
MATERIAL	STAINLESS STEEL	
SIZE	3 m/m	
WEIGHT	5 G/PIECE	
QUANTITY	6 PIECES	
INSERTS	2 GREEN / 4 BLACK	

TECHNICAL SPECIFICATIONS	
	
DIMENSIONS	m/m
A	37
B	29
C	14
D	22
E	4
F	5
G	12
LOAD	KG
WORKING LIMIT	110
BREAKING	550

MATERIAL		
AISI 304 STAINLESS STEEL	STANDARD	
CLOSING APPLIED BY MANUAL & ENTIRE SCREWING OF THE NUT		
TO GUARANTEE THE HIGHEST SAFETY (NO THREAD SHOULD BE OBVIOUS)		
SYSTEMATIC CONTROL OF MAILLON QUICK-LINKS BEFORE EVERY FLIGHT		

DESCRIPTION		
PULLEY	20 m/m	
CODE	RF25109	
MATERIALS	STAINLESS STEEL	
	NYLON	
	CARBON ACETAL	
BEARING	DELRIN®	
WEIGHT	9 G/PIECE	

TECHNICAL SPECIFICATIONS	
	
DIMENSIONS	m/m
A	32
B	20
C	20
Ø	6 max
LOAD	KG
WORKING LIMIT	250
BREAKING	550

THREAD

SAIL MAKING	
NAME	SERAFIL
N° OF REFERENCE	60
MATERIAL	POLYESTER
TYPE OF FINISH	SILK
LINEAR DENSITY	NM 61 / 3 (DTEX 163 * 3)
BREAKING STRENGTH	3,000 CN
ELONGATION	17,00%

PROPIETIES SERAFIL	
SOLIDITY ARTIFICIAL LIGTH	ISO 105 B02 > 5 - 6
SOLIDITY SWEAT	ISO 105 E04 > 4
SOLIDITY WASHING	ISO 105 C04 > 3
SOLIDITY GRAZE IN DRY	ISO 105 X12 > 4
SOLIDITY WASHING IN DRY	ISO 105 D01 > 3 - 4

TREATMENT WATER REPELLENT	WR
---------------------------	----

RISERS MAKING	
NAME	COATS BONDED C.F.P.
N° OF REFERENCE	V138
MATERIAL	POLYESTER
TYPE OF FINISH	SILK
BREAKING STRENGTH	9,5 KG
ELONGATION	19%

RISERS

RISERS	
N° OF REFERENCE	3455
MATERIAL	POLYESTER & TECHNORA
WIDTH	12 MM
THICKNESS	2,25 MM
BREAKING STRENGTH	1.100 DAN
ELONGATION	MAX. 11%
WEIGHT	21,1 G/M
COLOR	BLACK

COLOR INDICATOR	
N° OF REFERENCE	IC-G 1-2
MATERIAL	POLYESTER
WIDTH	70 M/M
THICKNESS	0,80 M/M
BREAKING STRENGTH	130 DN
ELONGATION	35 %
WEIGHT	32 G * L.M.
COLOR	GREEN

LOOPS	
N° OF REFERENCE	LKI - 10
MATERIAL	NYLON
WIDTH	10 M/M
BREAKING STRENGTH	84 KG
ELONGATION	30 %
WEIGHT	5,5 G/M
COLOR	WHITE



Niviuk Paragliders

C/ Del Ter 6 - nave D

17165 La Celler de Ter - Girona - Spain

+34 972 422 878 | info@niviuk.com

niviuk.com

